

eX Hybrid Slimline Aluminium


Awning Window



ELEVATED ENERGY PERFORMANCE

The eX Hybrid Slimline Aluminium awning window provides improved energy efficiency by integrating thermally broken technology. You still get the minimal, lightweight aesthetic of a Residential Aluminium window with added performance improvements with uValues as low as 2.6.

- eX Hybrid Series combines the power of thermally broken technology with our Aluminium product ranges.
- Achieve improved energy efficiency benefits over our Residential Aluminium windows.
- Aesthetics are designed to complement our residential aluminium range with mitre-cut sashes and slimline frame.
- Matches the sizing and product limitations for our Residential Aluminium awning windows.
- No changes to the way you build. Same build-in method as the Residential Aluminium range.
- Incorporate the eX Hybrid range into a mixed house lot to improve overall energy efficiency ratings.
- Double-glazing, offered as standard, prevents heat transfer between inside and outside, reduces energy bills and offers year-round comfort.
- Chain winder features a stainless-steel chain for durability and reliability.
- On larger windows, cam catches ensure a tight seal.
- Restricted opening option to prevent falls.
- Factory-fitted performance window seals offer improved noise insulation and prevent dust, water and wind penetration.
- A range of glazing options to improve comfort, serenity, security and privacy.

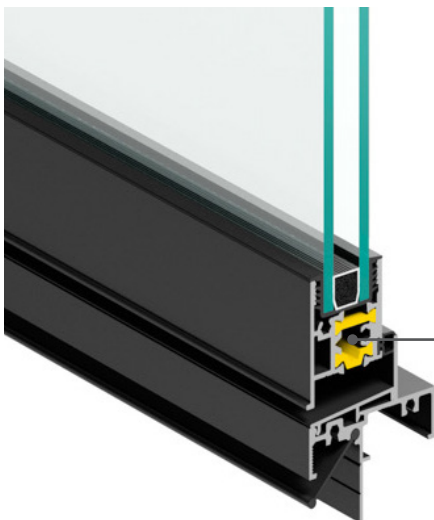

Thermally Broken Sash

Reduce heat transfer for improved energy efficiency and comfort. A low maintenance and durable window option.

eX Hybrid

Slimline Aluminium

Awning Window



SPECIFICATIONS

Product	Hybrid Awning Window
Product Series	Slimline Aluminium
Frame Profile	16mm X 50mm
Max Frame	600mm x 2400mm and 2400mm x 2400mm
Max Sash	558mm x 2360mm and 2358mm x 810mm
Sash Profile	42mm
Glazing	20mm
Bal Rating	BAL29 DTS
Seal Type	Bulb seal
Colour Options	Black Low Mar, Pearl White, Surfmist Matt, Monument Matt
Screen Options	Flyscreen and Barrier screen
Hardware Options	Chain Winder - Black, White, Monument, Brushed Nickel
Installation Options	By Builder or Stegbar Installation Service
Warranty	10-year warranty

For full range of configurations and standard sizes refer to the standard size and range charts.

HARDWARE



Chain Winder

PERFORMANCE

Wind & Water Performance	
Performance Criteria	Rating
SLS	800Pa
ULS	2000Pa
Water	200Pa
N Rating	N3 Corner/N4 General
Thermal Performance	
Performance Criteria	Rating
Uw Range	As low as 2.6
SHGC Range	0.26 - 0.58

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. Stegbar reserves the right to alter or amend without prior notice data and design details specified herein. stegbar.com.au STENAT0040/0724